


### Air-powered Sump Sharks® offer the deepest vacuum, pumping out pits up to 20' deep

- Ditch the grueling pail-n-shovel process! Clean dirty machine tool sumps\* faster, better and safer.
- Effectively filter chips and sludge from industrial fluids for re-use (when applicable). Pick up the thickest of sludge.
- Pump in/pump out capability.
- Convenient use of in-plant air supply.
- No moving parts. Simple to operate and maintain.
- Most popular and economically priced units in the Sump Shark fleet.
- Reduce machine tool downtime, labor costs and mess. Save time and money.
- Proudly designed and manufactured in the U.S.A.

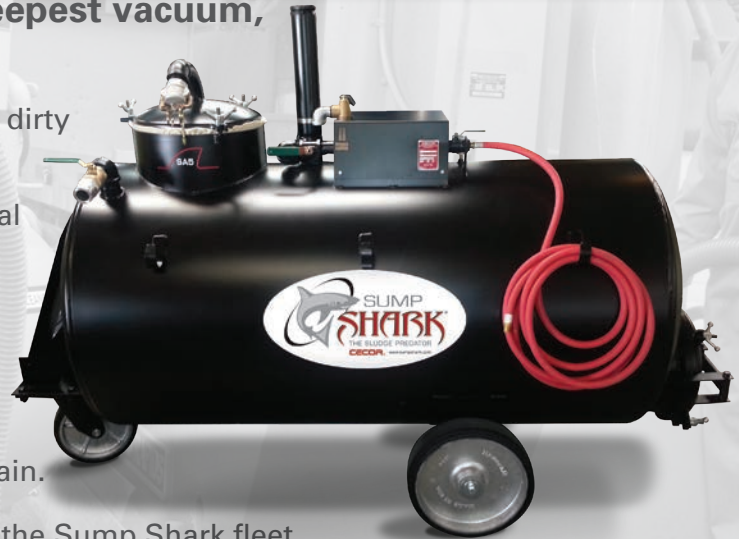

<b>Tank Size:</b>	60-, 90-, 140-, 175-, 300-, 400-, 500- and 600-gallon capacity
<b>Pump:</b>	Air-operated venturi
<b>Pumping Rate:</b>	Up to 70 gallons (264 liters) per minute
<b>Suction Lift:</b>	26" Hg (Mercury) or 350" (9 meters) water
<b>Requirements:</b>	<i>For optimal performance, requires air runs (headers) of 3/4" or larger and verticals (drops) of 1/2" or more with line pressure of 75 to 120 PSI (pounds per square inch) and volumetric capacity of 53 to 80 CFM (cubic feet per minute)</i>
<b>Filter:</b>	F10 Filter (1 cu. ft. capacity) is standard. Optional F23 (2.3 cu. ft. capacity) is recommended when coolant is loaded with chips and swarf. Coarse, regular and fine weaves available.
<b>Overfill Prevention:</b>	Automatic overfill protection, all discharge ports are valved
<b>Pressure Discharge:</b>	6 PSI with safety backup valve

\*Sump Sharks have proven effective in many types of applications: general machining, screw machines, grinding, water jet cutting, plasma cutting and more. Industrial fluids is a general term we use to mean coolant, metalworking fluids, cutting fluids, etc.

### SA5-60PL SUMP SHARK

CECOR's smallest sump cleaner, the SA5-60PL, has a unique vertical design for shops with limited floorspace. High-suction lift sucks out everything in the sump -- chips, fines, particles and fluid.

- 60-gallon tank
- Space-saving vertical design for shops with limited space
- Same power as larger air unit, but in smaller package
- Pumping rate up to 70 gallons (264 l.) per minute
- 1 cu. ft. filter standard, optional 2.3 cu. ft. available

