


Beats the grueling pail-n-shovel process for those on a budget

- Convert any standard, open-ended 55-gallon drum tank (or CECOR TX-55PL) into a “sump cleaner.”
- Save time by replacing your diaphragm pump. Pump at 40 – 70 gallons per minute (depending on model).
- Ideal for removing spent coolant & sludge from machine tool sumps.
- Simply set on top of a drum tank for use. Easily lift and move drum tops from one tank to another.
- Power the drum tops by air or single-phase “plug-n-play” electric.

See our Sump Shark® sump cleaner product line for advanced capabilities.



PAIL-N-SHOVEL NO MORE!

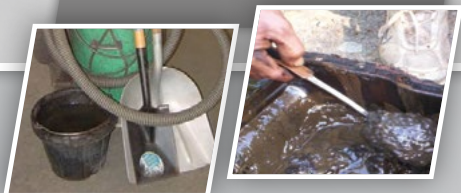

TX-55PL DRUM TANK

CECOR's heavy-duty 55-gallon drum tank, made of heavy gauge steel, is stronger than standard 55-gallon drums. The tank is mounted on four casters for easy rolling and maneuverability. Fork pockets built into the base provide easy handling by fork truck. The tank features an 8" x 10" cleanout door for removing settled solids. Valve in door permits fluid to drain out, leaving the solids behind for easier collection and disposal.

DRUM TOP UNITS



SA3-DT



SA5-DT



SE15-DT

CECOR. DRUM TOP SUMP CLEANERS

SA3-DT (Air)



SA5-DT (Air)



SE15-DT (Electric)



Model	SA3-DT	SA5-DT	SE15-DT
Pump Unit	Air-operated venturi	Air-operated venturi	Electric
Suction Lift	12" hg or 163" water (4 meters)	26" hg or 350" water (9 meters)	13" hg or 177" water (4.5 meters)
Pump Rate	40 gpm (151 liters)	70 gpm (294 liters)	60 gpm (227 liters)
Requirements	For optimal performance, requires air runs (headers) of 3/4" or larger and verticals (drops) of 1/2" or more with line pressure of 75 to 120 psi & 19-27 cfm	For optimal performance, requires air runs (headers) of 3/4" or larger and verticals (drops) of 1/2" or more with line pressure of 75 to 120 psi & 56-80 cfm	115 volts 14.2 Amps.
Power Connect	1/2" x 20' air hose with 1/2" npt ends	1/2" x 20' air hose with 1/2" npt ends	15' power cord with NEMA 5-15 plug
Suction Hose	1-1/2" ID X 16' oil-resistant PVC suction hose including quick-disconnect coupler	1-1/2" ID X 16' oil-resistant PVC suction hose including quick-disconnect coupler	1-1/2" ID X 16' oil-resistant PVC suction hose including quick-disconnect coupler
Overfill Control	Automatic overfill protection	Automatic overfill protection	Automatic overfill protection

TX-55PL with SA5-DT

Model	Wheels	Dimensions (L x W x H)	Shipping Weight
SA3-DT	N/A	27" x 27" x 9"	60 lbs.
SA5-DT	N/A	31" x 27" x 46"	75 lbs.
SE15-DT	N/A	31" x 27" x 46"	75 lbs.
TX-55PL Drum Tank	Two rigid and two swivel casters with 5" phenolic wheels	31" x 27" x 46"	210 lbs.



SA5-60PL-V



See our brochure for our Sump Shark Series

SE15-140PTL-H



More power
Greater suction
Pressure discharge
Filtering included
60 to 600 gallon capacities
Plus more...

Caution: Machines must not be used for flammable fluids (fuels, paints, solvents, etc). Avoid use in extra-high temperature or spark-hazard environments (ovens, welding areas, etc).

Note: Engineering specifications subject to change without notice.